


WBF



Mounting Dimension

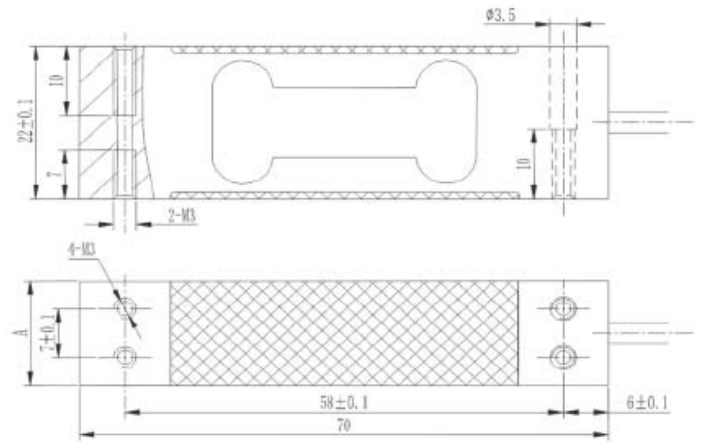


| Specifications | | WBF |
|----------------------------|------------|-------------------|
| Capacity | g | 300, 500 |
| Accuracy class | | C3 |
| Sensitivity | %mV/V | 1.0±10 |
| Zero balance | %F.S. | ± 2.0 |
| Non-linearity | %F.S. | 0.015 |
| Hysteresis | %F.S. | 0.015 |
| Repeatability | %F.S. | 0.015 |
| Creep(30min) | %F.S. | 0.0166 |
| Temp.effect on output | %F.S./10°C | 0.017 |
| Temp.effect on zero | %F.S./10C° | 0.02 |
| Input impedance | Ω | 380 ± 40 |
| Output impedance | Ω | 380 ± 40 |
| Insulation | | ≥5000M Ohm/100VDC |
| Recommended excitation | V | 5-15 |
| Maximum excitation Voltage | V | 20 |
| Compensated temp. range | °C | -10 - 40 |
| Operating temp. range | °C | -25 - 70 |
| Safe load limit | %F.S. | 150 |
| Breaking load | %F.S. | 300 |
| Cable size | mm | 4 × 400 |
| Weight approx. | kg | 0.1 |
| Material | | aluminum alloy |
| IP Class | | IP 65 |
| Max.platform size | mm | 200 × 200 |


Features & Applications

- Made of aluminum alloy
- High accuracy, high side load tolerance
- Easy to install
- Mainly used for electronic scales, electronic balance, price computing scales and industrial weighing systems
- IP65

Load Direction

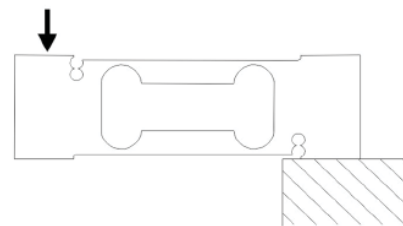


Wiring Code

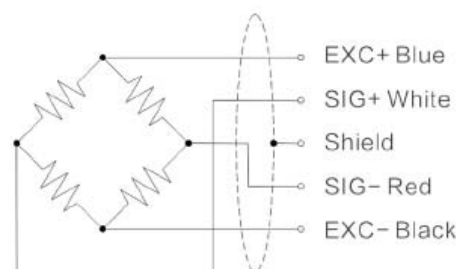

WBF



Mounting Dimension

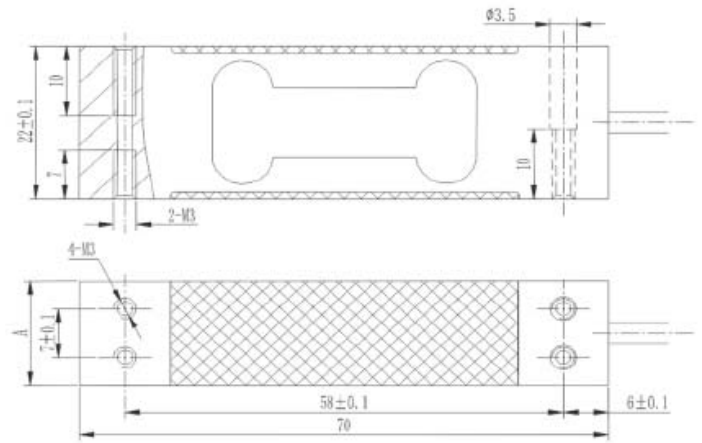


| Specifications | | WBF |
|----------------------------|------------|-------------------|
| Capacity | kg | 1, 1.5, 2, 3, 4 |
| Accuracy class | | C3 |
| Sensitivity | %mV/V | 1.0±10 |
| Zero balance | %F.S. | ± 2.0 |
| Non-linearity | %F.S. | 0.015 |
| Hysteresis | %F.S. | 0.015 |
| Repeatability | %F.S. | 0.015 |
| Creep(30min) | %F.S. | 0.0166 |
| Temp.effect on output | %F.S./10°C | 0.017 |
| Temp.effect on zero | %F.S./10C° | 0.02 |
| Input impedance | Ω | 380 ± 40 |
| Output impedance | Ω | 380 ± 40 |
| Insulation | | ≥5000M Ohm/100VDC |
| Recommended excitation | V | 5-15 |
| Maximum excitation Voltage | V | 20 |
| Compensated temp. range | °C | -10 - 40 |
| Operating temp. range | °C | -25 - 70 |
| Safe load limit | %F.S. | 150 |
| Breaking load | %F.S. | 300 |
| Cable size | mm | 4 × 400 |
| Weight approx. | kg | 0.1 |
| Material | | aluminum alloy |
| IP Class | | IP 65 |
| Max.platform size | mm | 200 × 200 |

Features & Applications

- Made of aluminum alloy
- High accuracy, high side load tolerance
- Easy to install
- Mainly used for electronic scales, electronic balance, price computing scales and industrial weighing systems
- IP65

Load Direction

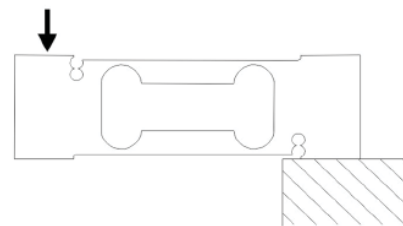

Wiring Code

