


WBK



Mounting Dimension

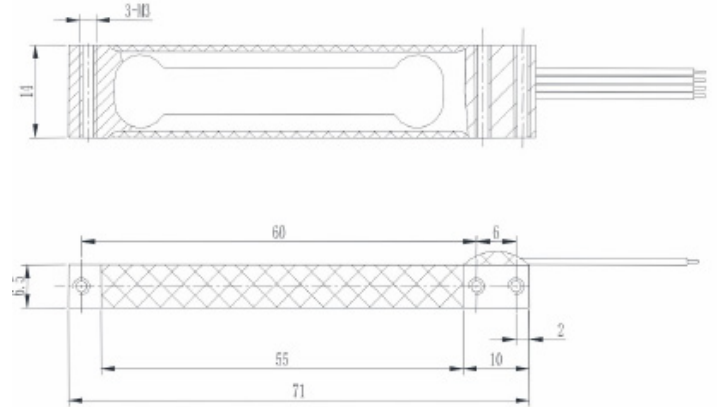


Specifications		WBK
Capacity	g	100, 200
Accuracy class		C3
Sensitivity	%mV/V	0.9±0.1
Zero balance	mV/V	± 0.05
Non-linearity	%F.S.	0.015
Hysteresis	%F.S.	0.015
Repeatability	%F.S.	0.015
Creep(30min)	%F.S.	0.0166
Temp.effect on output	%F.S./10°C	0.02
Temp.effect on zero	%F.S./10C°	0.03
Input impedance	Ω	405 ± 20
Output impedance	Ω	350 ± 10
Insulation		≥5000M Ohm/100VDC
Recommended excitation	V	5-15
Maximum excitation Voltage	V	20
Compensated temp. range	°C	-10 - 40
Operating temp. range	°C	-10 - 50
Safe load limit	%F.S.	150
Breaking load	%F.S.	200
Cable size	mm	4 × 100
Weight approx.	kg	0.1
Material		Aluminum alloy
IP Class		IP65

Features & Applications

- Made of aluminium alloy
- High accuracy, high side load tolerance
- Easy to install
- IP65 protection
- Mainly used for electronic scales, electronic balance, price computing scales and industrial weighing systems

Load Direction

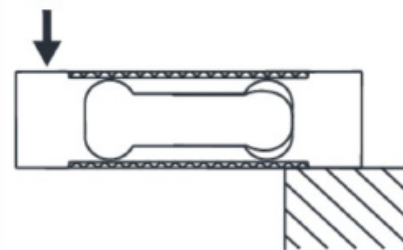

Wiring Code

